


LINEAR SYSTEMS

Twenty-Five Years Of Quality Through Innovation

LS830 LS831 LS832 LS833

ULTRA LOW LEAKAGE LOW DRIFT
MONOLITHIC DUAL N-CANNEL
JFET AMPLIFIER

FEATURES		
ULTRA LOW DRIFT	$ \Delta V_{GS1-2}/\Delta T = 5\mu V/^{\circ}C$ max.	
ULTRA LOW NOISE	$I_G=80fA$ TYP.	
LOW NOISE	$e_n=70nV/\sqrt{Hz}$ TYP.	
LOW CAPACITANCE	$C_{ISS}=3pf$ max.	
ABSOLUTE MAXIMUM RATINGS NOTE 1		
@ 25°C (unless otherwise noted)		
Maximum Temperatures		
Storage Temperature	-55 to +150°C	
Operating Junction Temperature	-55 to +150°C	
Maximum Voltage and Current for Each Transistor NOTE 1		
-V _{GSS}	Gate Voltage to Drain or Source	40V
-V _{DSS}	Drain to Source Voltage	40V
-I _{G(f)}	Gate Forward Current	10mA
-I _G	Gate Reverse Current	10µA
Maximum Power Dissipation @ TA = 25°C		
Continuous Power Dissipation (Total)		500mW

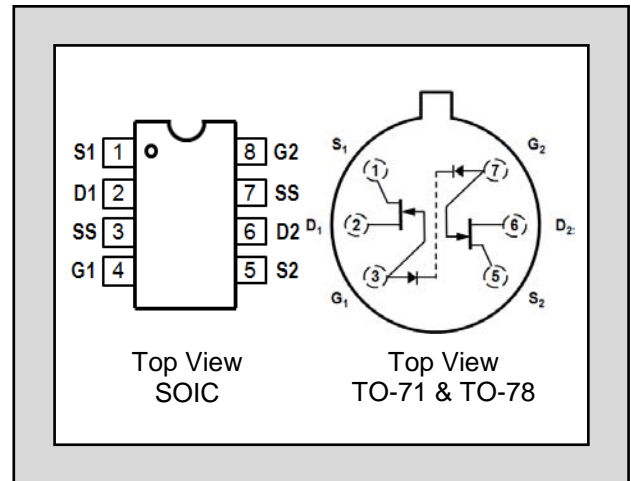


SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNITS	CONDITIONS
BV _{GSS}	Breakdown Voltage	-40	-60	--	V	V _{DS} = 0 I _G = -1nA
BV _{GGO}	Gate-to-Gate Breakdown	±40	--	--	V	I _G = ±1µA I _D = 0 I _S = 0
TRANSCONDUCTANCE						
g _{fs}	Full Conduction	70	300	500	µS	V _{DG} = 10V V _{GS} = 0 f = 1kHz
g _{fs}	Typical Operation	50	100	200	µS	V _{DG} = 10V I _D = 30µA f = 1kHz
g _{fs1-2} /g _{fs}	Differential	--	1	5	%	
DRAIN CURRENT						
I _{DSS}	Full Conduction	60	400	1000	µA	V _{DG} = 10V V _{GS} = 0
I _{DSS1-2} /I _{DSS}	Differential at Full Conduction	--	2	5	%	

ELECTRICAL CHARACTERISTICS TA = 25°C (unless otherwise noted)

SYMBOL	CHARACTERISTIC	LS830	LS831	LS832	LS833	UNITS	CONDITIONS
$ \Delta V_{GS1-2}/\Delta T $ max.	Drift vs. Temperature	5	10	20	75	µV/°C	V _{DG} = 10V I _D = 30µA TA = -55°C to +125°C
V _{GS1-2} max.	Offset Voltage	25	25	25	25	mV	V _{DG} = 10V I _D = 30µA
-I _G typical	Operating	0.1	0.1	0.1	0.5	pA	
-I _G typical	High Temperature	0.1	0.1	0.1	0.5	nA	TA= +125°C
I _{GSS} typical	At Full Conduction	0.2	0.2	0.2	1.0	pA	V _{GS} = 20V, V _{GS} = 0V
I _{GSS} typical	High Temperature	0.5	0.5	0.5	1.0	nA	V _{GS} = 0 V _{GS} = 20V TA= +125°C

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNITS	CONDITIONS
$V_{GS(off)}$	GATE-SOURCE					
	Cutoff Voltage	-0.6	-2	-4.5	V	$V_{DS}= 10V$ $I_D= 1nA$
V_{GS}	Operating Range	--	--	-4	V	$V_{DG}= 10V$ $I_D= 30\mu A$
I_{GGO}	GATE CURRENT					
	Gate-to-Gate Leakage	--	1	--	pA	$V_{GG}= \pm 20V$ $I_D = I_S = 0A$
g_{oss}	OUTPUT CONDUCTANCE					
	Full Conduction	--	--	5	μS	$V_{DG}= 10V$ $V_{GS}= 0$
	Operating	--	--	0.5	μS	$V_{DG}= 10V$ $I_D= 30\mu A$
$ g_{os1-2} $	Differential	--	--	0.1	μS	
CMRR	COMMON MODE REJECTION					
	$-20 \log \Delta V_{GS1-2}/ \Delta V_{DS} $	--	90	--	dB	$\Delta V_{DS}= 10$ to $20V$ $I_D=30\mu A$
CMRR	$-20 \log \Delta V_{GS1-2}/ \Delta V_{DS} $	--	90	--	dB	$\Delta V_{DS}= 5$ to $10V$ $I_D=30\mu A$
NF	NOISE					
	Figure	--	--	1	dB	$V_{DS}= 10V$ $V_{GS}= 0$ $R_G=10M\Omega$ $f= 100Hz$ $NBW= 6Hz$
e_n	Voltage	--	20	70	nV/ \sqrt{Hz}	$V_{DG}= 10V$ $I_D= 30\mu A$ $f= 10Hz$ $NBW= 1Hz$
C_{ISS}	CAPACITANCE					
C_{RSS}	Input	--	--	3	pF	$V_{DS}= 10V$ $V_{GS}= 0$ $f= 1MHz$
C_{RSS}	Reverse Transfer	--	--	1.5	pF	$V_{DS}= 10V$ $V_{GS}= 0$ $f= 1MHz$
C_{DD}	Drain-to-Drain	--	--	0.1	pF	$V_{DG}= 10V$ $I_D= 30\mu A$

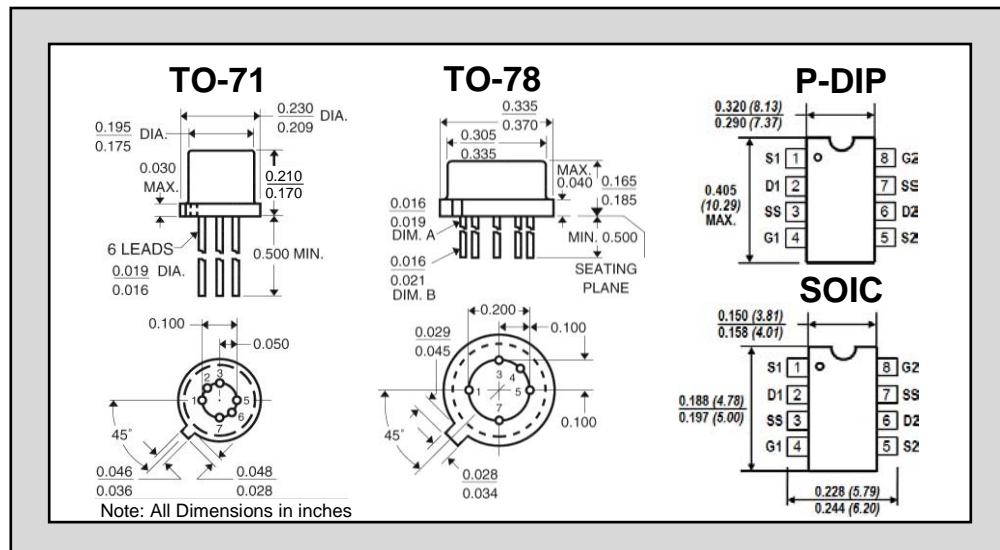

NOTES:

- These ratings are limiting values above which the serviceability of any semiconductor may be impaired

Information furnished by Linear Integrated Systems is believed to be accurate and reliable. However, no responsibility is assumed for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Linear Integrated Systems.

Linear Integrated Systems (LIS) is a 25-year-old, third-generation precision semiconductor company providing high-quality discrete components. Expertise brought to LIS is based on processes and products developed at Amelco, Union Carbide, Intersil and Micro Power Systems by company President John H. Hall. Hall, a protégé of Silicon Valley legend Dr. Jean Hoerni, was the director of IC Development at Union Carbide, Co-Founder and Vice President of R&D at Intersil, and Founder/President of Micro Power Systems.