



Linear Voltage Regulator – 78L05

Positive Fixed 5V Voltage Regulator in bare die form

Rev 1.1
20/12/17

Description

The 78L05 is a 5V fixed 3-terminal voltage regulator delivering up to 100mA of output current and equipped with internal limiting + thermal shutdown features for overload immunity. Implementing this device at point-of-source removes the complexity of single point regulation methods with reduced noise. Used in replacement of a Zener diode/resistor combination, the device improves output impedance by x2 order of magnitude and delivers lower bias current with lower noise. The 78L05 can also be used with power-pass elements to make high-current voltage regulators.

Features:

- $\pm 5\%$ V_{OUT} tolerance over entire temperature range
- 100mA Output Current
- Internal thermal overload protection
- Internal short circuit current limit
- Full Military Temperature Range
- Negative Voltage complement is 79L05

Ordering Information

The following part suffixes apply:


- No suffix - MIL-STD-883 /2010B Visual Inspection
- "H" - MIL-STD-883 /2010B Visual Inspection + MIL-PRF-38534 Class H LAT
- "K" - MIL-STD-883 /2010A Visual Inspection (Space) + MIL-PRF-38534 Class K LAT

LAT = Lot Acceptance Test.

For further information on LAT process flows see below.

www.siliconsupplies.com/quality/bare-die-lot-qualification

Die Dimensions in μm (mils)

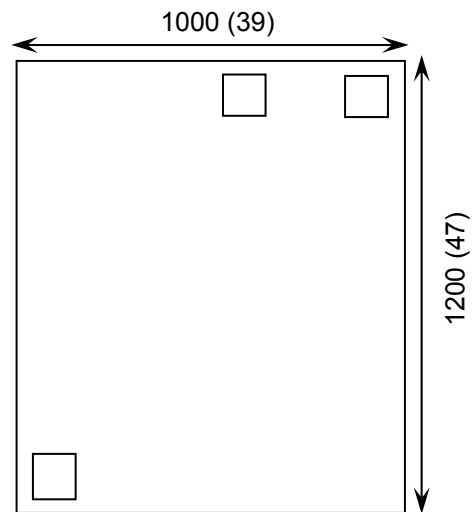

Supply Formats:

- Default – Die in Waffle Pack (400 per tray capacity)
- Sawn Wafer on Tape – On request
- Unsawn Wafer – On request
- With Ti/Ni/Ag Back Metal – On request
- In Metal or Ceramic package – On request

Mechanical Specification

Die Size (Unsawn)	1000 x 1200 39.37 x 47.24	μm mils
Minimum Bond Pad Size	110 x 105 4.33 x 4.13	μm mils
Die Thickness	280 (± 20) 11 (± 0.8)	μm mils
Top Metal Composition	Al 1%Si 1.4 μm	
Back Metal Composition	N/A – Bare Si	






Linear Voltage Regulator – 78L05


Rev 1.1
20/12/17

Pad Layout and Functions

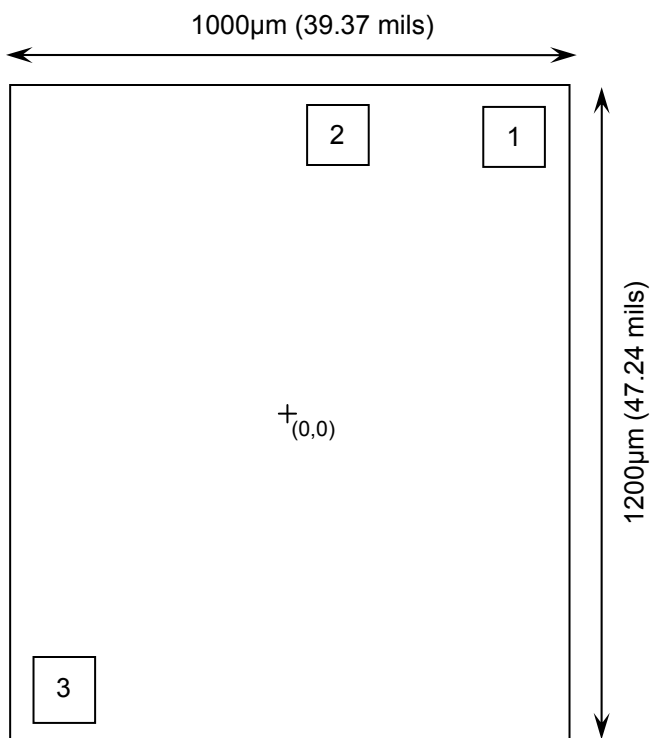

PAD	FUNCTION	COORDINATES (µm)	
		X	Y
1	V _{IN}	312	407
2	V _{OUT}	30	410
3	GND	-412	-508
CONNECT CHIP BACK TO GND			

Typical Application

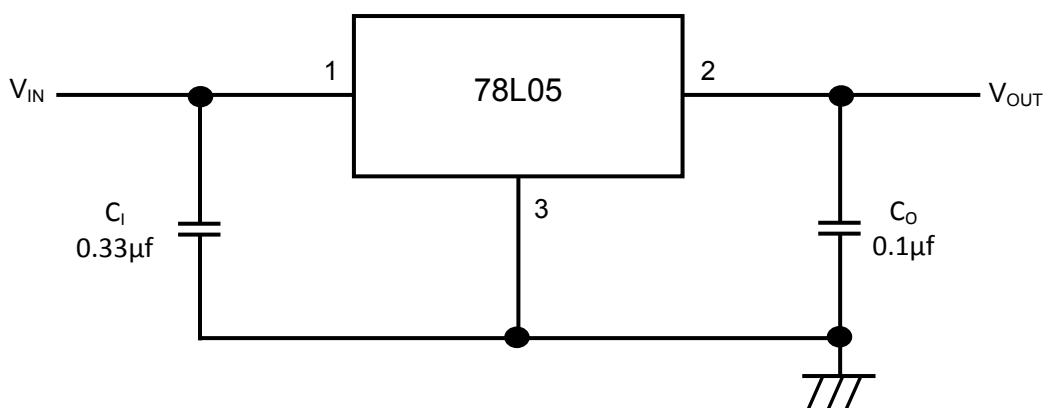

C_I is required if the regulator is located an appreciable distance from power supply filter. C_O is not required for stability; however it does improve transient response. For optimum stability and transient response locate C_I , C_O as close as possible to the regulator.





Linear Voltage Regulator – 78L05

Rev 1.1
20/12/17

Absolute Maximum Ratings

PARAMETER	SYMBOL	VALUE	UNIT
Input Voltage	V_{IN}	30	V
Power Dissipation ¹	P_D	620	mW
Operating Temperature Range	-	-55 to 125	°C
Maximum Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-65 to 150	°C

Recommended Operating Conditions

PARAMETER	SYMBOL	MIN	MAX	UNIT
Input Voltage	V_{IN}	7	20	V
Output Current	I_{OUT}	-	100	mA
Operating Temperature Range	T_J	-55	125	°C

DC Electrical Characteristics, $V_I=10V$, $I_{OUT}=40mA$, $C_I=0.33\mu F$, $C_O=0.1\mu f$, $0^\circ C < T_J < +125^\circ C$ (unless noted otherwise)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	$T_J = 25^\circ C$, $I_O=40mA$	4.80	5.00	5.20	V
		$1mA \leq I_{OUT} \leq 40mA$, $7V \leq V_{IN} \leq 20V$	4.75	5.00	5.25	
		$1mA \leq I_{OUT} \leq 70mA$, $V_{IN} = 10V$	4.75	5.00	5.25	
Line Regulation	ΔV_{OUT}	$7V \leq V_{IN} \leq 20V$, $T_J = 25^\circ C$, $I_O=40mA$	-	32	150	mV
		$8V \leq V_{IN} \leq 20V$, $T_J = 25^\circ C$, $I_O=40mA$	-	26	100	
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 100mA$, $T_J = 25^\circ C$	-	15	60	mV
		$1mA \leq I_{OUT} \leq 40mA$, $T_J = 25^\circ C$	-	8	30	
Input Bias Current	I_B	$T_J = 25^\circ C$	-	3.8	6.0	mA
		$T_J = 125^\circ C$	-	-	5.5	
Input Bias Current Change	ΔI_B	$8V \leq V_{IN} \leq 20V$	-	-	1.5	mA
		$1mA \leq I_{OUT} \leq 40mA$	-	-	0.1	
Output Noise Voltage	e_N	$10Hz \leq f \leq 100KHz$, $T_A = 25^\circ C$	-	42	-	μV_{RMS}
Ripple Rejection	RR	$f = 120Hz$, $8V \leq V_{IN} \leq 18V$, $T_J = 25^\circ C$	41	49	-	dB
Dropout Voltage	V_D	$V_{IN} - V_{OUT}$	-	1.7	-	V

1. Value measured in TO-92 package applicable only for DC power dissipation permitted by absolute maximum ratings. Results in die form are dependent on die attach and assembly method.





Linear Voltage Regulator – 78L05

Rev 1.1
20/12/17

DISCLAIMER: The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Silicon Supplies Ltd hereby disclaims any and all warranties and liabilities of any kind.

LIFE SUPPORT POLICY: Silicon Supplies Ltd components may be used in life support devices or systems only with the express written approval of Silicon Supplies Ltd, if a failure of such components can reasonably be expected to cause the failure of that life support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

