

# EPIGAP Optronik GmbH

Koepenicker Str. 325b  
 D-12555 Berlin  
 Fon: +49 (0)30 657637 60  
 Fax: +49 (0)30 657637 70  
 sales@epigap-optronic.de




## Data Sheet

### LED Chip Infrared

EOLC-1060-17-1D

Rev. 04, 2017

Radiation	Type	Electrodes
Infrared	MQW / GaAs	P (anode) up

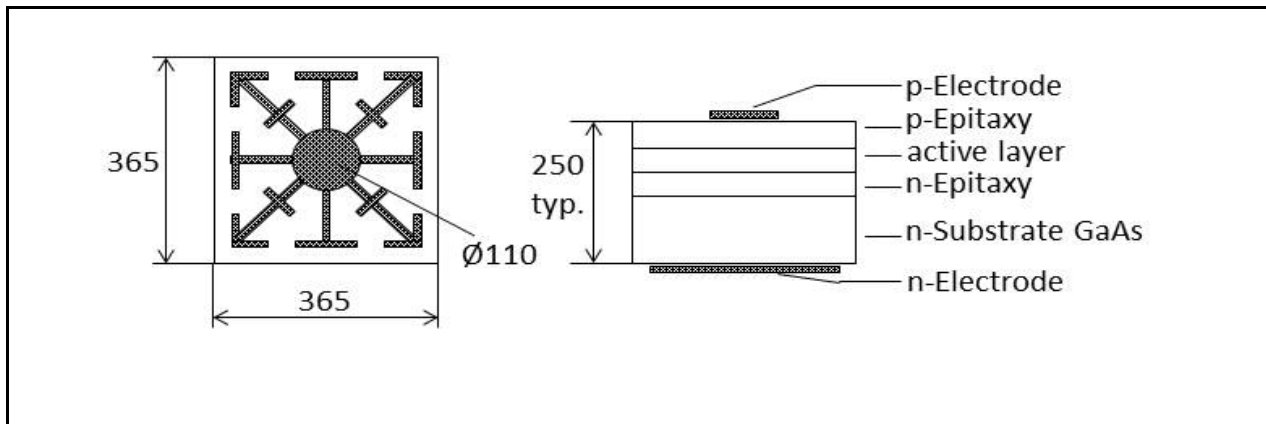

### Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test cond.	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 20 \text{ mA}$	$V_F$		1.15	1.3	V
Forward voltage	$I_F = 100 \text{ mA}$	$V_F$		1.25	1.4	V
Reverse current	$I_R = 5 \text{ V}$	$I_R$			10	$\mu\text{A}$
Output power*	$I_F = 50 \text{ mA}$	$\Phi_e$	3.5	4		mW
Radiant intensity	$I_F = 100 \text{ mA}$	$I_e$		1		mW/sr
Peak wavelength	$I_F = 20 \text{ mA}$	$\lambda_p$	1040	1060	1080	nm
FWHM	$I_F = 20 \text{ mA}$	$\Delta\lambda_{0.5}$		80		nm
Switching time	$I_F = 20 \text{ mA}$	$t_r, t_f$		20		ns

\*Measured on bare chip on TO-18 header

### Packing

Chips on adhesive film with wire-bond side top

Art. No. 113 031



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.