



# 0.5W, 50 $\mu$ A I<sub>ZT</sub>, Bare Die Zener Diode


Rev 1.0  
27/1/21

Silicon Planar Zener diode in bare die form – 5% tolerance

## Features:

- Sharp Reverse Characteristics
- Low Reverse Current Levels
- High Reliability Gold Back Metal
- High Reliability tested grades.

## Die Dimensions in $\mu$ m (mils)

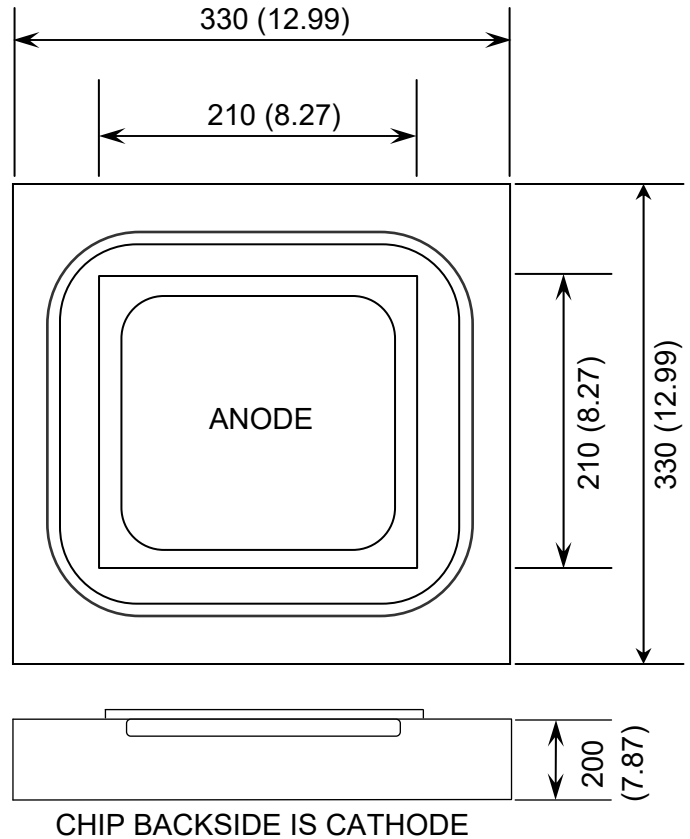

## Ordering Information

The following part suffixes apply:

- No suffix - MIL-STD-750 /2073 Visual Inspection
- “H” - MIL-STD-750 /2073 Visual Inspection  
+ MIL-PRF-38534 Class H LAT
- “K” - MIL-STD-750 /2073 Visual Inspection  
+ MIL-PRF-38534 Class K LAT

LAT = Lot Acceptance Test.

For further information on LAT process flows see below.

[www.siliconsupplies.com/quality/bare-die-lot-qualification](http://www.siliconsupplies.com/quality/bare-die-lot-qualification)

## Supply Formats:

- Default – Die in Waffle Pack (400 per tray capacity)
- Sawn Wafer on Tape – By specific request
- Unsawn Wafer – By specific request
- Tighter V<sub>Z</sub> tolerances:  
2% - B grade, 1% - A grade – Specific request

## Mechanical Specification

Die Size (Unsawn)	330 x 330 12.99 x 12.99	$\mu$ m mils
Anode Pad Size	210 x 210 8.27 x 8.27	$\mu$ m mils
Die Thickness	200 7.87	$\mu$ m mils
Top Metal Composition	Al	
Back Metal Composition	Au	





# 0.5W, 50 $\mu$ A I<sub>ZT</sub> , Bare Die Zener Diode

Rev 1.0  
27/1/21

## Absolute Maximum Ratings<sup>1</sup> T<sub>A</sub> = 25°C unless otherwise stated

PARAMETER	SYMBOL	VALUE	UNIT
Power Dissipation <sup>2</sup>	P <sub>TOT</sub>	500	mW
Junction Temperature	T <sub>J</sub>	175	°C
Storage Temperature Range	T <sub>S</sub>	-65 to +200	°C
Forward Voltage @ I <sub>F</sub> = 200mA	V <sub>F</sub>	1.5	V

## Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise stated

DEVICE	ZENER VOLTAGE RANGE			TEST CURRENT	REVERSE LEAKAGE CURRENT			MAXIMUM VOLTAGE REGULATION <sup>3</sup>	MAXIMUM DC ZENER CURRENT
	V <sub>Z</sub> @ I <sub>ZT</sub>			I <sub>ZT</sub>	I <sub>R</sub> @ V <sub>R</sub>			ΔV <sub>Z</sub>	I <sub>ZM</sub>
	V			μA	μA	V	V	mA	
	Min.	Nom.	Max.						
1N4678	1.71	1.8	1.89	50	7.5	1	0.70	120.0	
1N4679	1.9	2	2.1	50	5.0	1	0.70	110.0	
1N4680	2.09	2.2	2.31	50	4.0	1	0.75	100.0	
1N4681	2.28	2.4	2.52	50	2.0	1	0.80	95.0	
1N4682	2.565	2.7	2.835	50	1.0	1	0.80	90.0	
1N4683	2.85	3	3.15	50	0.8	1	0.90	85.0	
1N4684	3.135	3.3	3.465	50	7.5	1.5	0.95	80.0	
1N4685	3.42	3.6	3.78	50	7.5	2	0.95	75.0	
1N4686	3.705	3.9	4.095	50	5.0	2	0.97	70.0	
1N4687	4.085	4.3	4.515	50	4.0	2	0.99	65.0	
1N4688	4.465	4.7	4.935	50	10	3	0.99	60.0	
1N4689	4.845	5.1	5.355	50	10	3	0.97	55.0	
1N4690	5.32	5.6	5.88	50	10	4	0.96	50.0	
1N4691	5.89	6.2	6.51	50	10	5	0.95	45.0	
1N4692	6.46	6.8	7.14	50	10	5.1	0.90	35.0	
1N4693	7.125	7.5	7.875	50	10	5.7	0.75	31.8	
1N4694	7.79	8.2	8.61	50	1.0	6.2	0.50	29.0	
1N4695	8.265	8.7	9.135	50	1.0	6.6	0.10	27.4	
1N4696	8.645	9.1	9.555	50	1.0	6.9	0.08	26.2	
1N4697	9.5	10	10.5	50	1.0	7.6	0.10	24.8	
1N4698	10.45	11	11.55	50	0.05	8.4	0.11	21.6	
1N4699	11.4	12	12.6	50	0.05	9.1	0.12	20.4	
1N4700	12.35	13	13.65	50	0.05	9.8	0.13	19.0	





# 0.5W, 250 $\mu$ A I<sub>ZT</sub> , Bare Die Zener Diode

Rev 1.0

27/1/21

## Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise stated

DEVICE	ZENER VOLTAGE RANGE <sup>3</sup>			TEST CURRENT	REVERSE LEAKAGE CURRENT		MAXIMUM VOLTAGE REGULATION <sup>4</sup>	MAXIMUM DC ZENER CURRENT
	V <sub>Z</sub> @ I <sub>ZT</sub>			I <sub>ZT</sub>	I <sub>R</sub> @ V <sub>R</sub>		$\Delta$ V <sub>Z</sub>	I <sub>ZM</sub>
	V			$\mu$ A	$\mu$ A	V	V	mA
	Min.	Nom.	Max.					
1N4701	13.3	14	14.7	50	0.05	10.6	0.14	17.5
1N4702	14.25	15	15.75	50	0.05	11.4	0.15	16.3
1N4703	15.2	16	16.8	50	0.05	12.1	0.16	15.4
1N4704	16.15	17	17.85	50	0.05	12.9	0.17	14.5
1N4705	17.1	18	18.9	50	0.05	13.6	0.18	13.2
1N4706	18.05	19	19.95	50	0.05	14.4	0.19	12.5
1N4707	19	20	21	50	0.01	15.2	0.20	11.9
1N4708	20.9	22	23.1	50	0.01	16.7	0.22	10.8
1N4709	22.8	24	25.2	50	0.01	18.2	0.24	9.9
1N4710	23.75	25	26.25	50	0.01	19.0	0.25	9.5
1N4711	25.65	27	28.35	50	0.01	20.4	0.27	8.8
1N4712	26.6	28	29.4	50	0.01	21.2	0.28	8.5
1N4713	28.5	30	31.5	50	0.01	22.8	0.30	7.9
1N4714	31.35	33	34.65	50	0.01	25.0	0.33	7.2
1N4715	34.2	36	37.8	50	0.01	27.3	0.36	6.6
1N4716	37.05	39	40.95	50	0.01	29.8	0.39	6.1
1N4717	40.85	43	45.15	50	0.01	32.6	0.43	5.5

1. Operation above the absolute maximum rating may cause device failure. Operation at the absolute maximum ratings, for extended periods, may reduce device reliability.
2. Assembled in DO-35 package. Performance in die form subject to assembly heat sinking and die attach methods.
3. Zener voltage is read using a pulse measurement, 10 milliseconds maximum.
4. V<sub>Z</sub> @ 100 $\mu$ A minus V<sub>Z</sub> @ 10 $\mu$ A.

**DISCLAIMER:** The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Silicon Supplies Ltd hereby disclaims any and all warranties and liabilities of any kind.

**LIFE SUPPORT POLICY:** Silicon Supplies Ltd components may be used in life support devices or systems only with the express written approval of Silicon Supplies Ltd, if a failure of such components can reasonably be expected to cause the failure of that life support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

