



High Speed CMOS TTL Input – 74HCT373

8-bit transparent D-Type Latch with 3-State Outputs in bare die form

Rev 1.0
07/02/19

Description

The 74HCT373 consists of eight D-type transparent latches fabricated using a 2.5µm 5V CMOS process to combine high speed performance LSTTL performance with CMOS low power consumption. Each latch is equipped with separate D-Type inputs and 3-State outputs for bus oriented applications. Data output changes asynchronously and data may be latched even when the outputs are not enabled. Device inputs directly accept both standard CMOS and LSTTL outputs. All inputs are equipped with protection circuits against static discharge and transient excess voltage.

Features:

- Output Drive Capability: 15 LSTTL Loads
- Low Input Current: 1µA
- TTL / CMOS compatible Input Levels
- Outputs directly interface CMOS, NMOS and TTL
- Operating Voltage Range: 4.5V to 5.5V
- Function compatible with 74LS373.

Ordering Information


The following part suffixes apply:

- No suffix - MIL-STD-883 /2010B Visual Inspection

For High Reliability versions of this product please see

[54HCT373](#)

Die Dimensions in µm (mils)

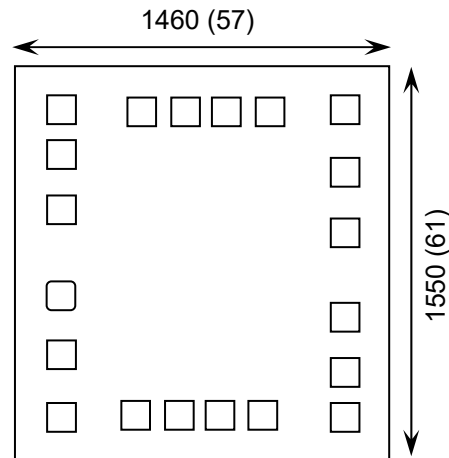

Supply Formats:

- Default – Die in Waffle Pack (100 per tray capacity)
- Sawn Wafer on Tape – On request
- Unsawn Wafer – On request
- Die Thickness <=> 350µm(14 Mils) – On request
- Assembled into Ceramic Package – On request

Mechanical Specification

Die Size (Unsawn)	1460 x 1550 57 x 61	µm mils
Minimum Bond Pad Size	108 x 108 4.25 x 4.25	µm mils
Die Thickness	350 (±20) 13.78 (±0.79)	µm mils
Top Metal Composition	Al 1%Si 1.1µm	
Back Metal Composition	N/A – Bare Si	






High Speed CMOS TTL Input – 74HCT373

Rev 1.0
07/02/19


Pad Layout and Functions

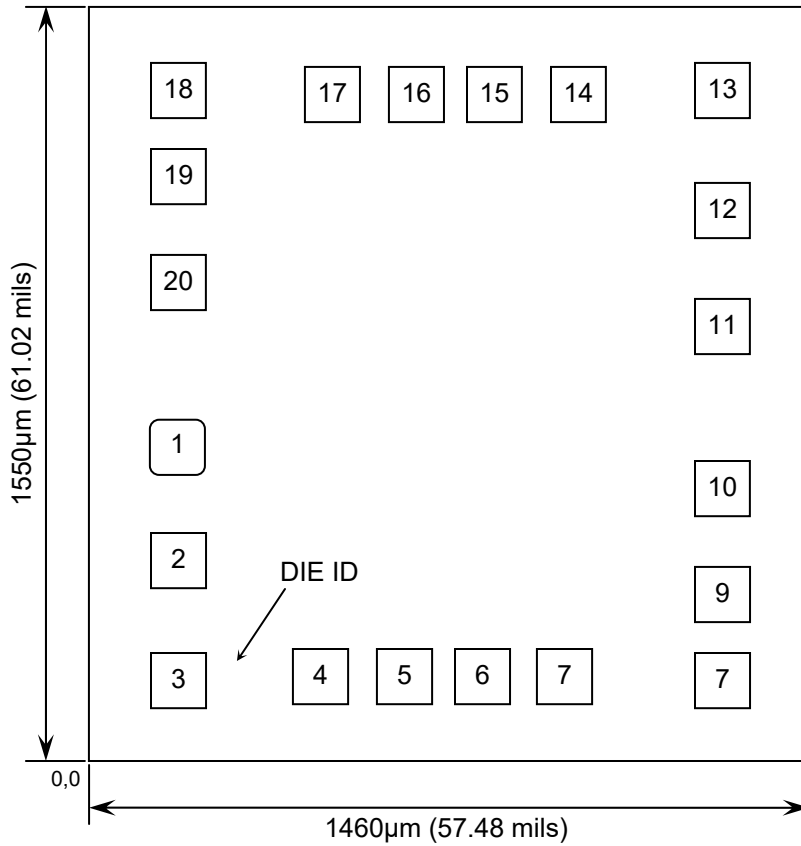

PAD	FUNCTION	COORDINATES (mm)	
		X	Y
1	\overline{OE}	0.1205	0.597
2	1Q	0.1205	0.3595
3	1D	0.1205	0.122
4	2D	0.413	0.1225
5	2Q	0.582	0.1225
6	3Q	0.7415	0.1225
7	3D	0.913	0.1225
8	4D	1.234	0.116
9	4Q	1.232	0.29
10	GND	1.232	0.51
11	LE	1.232	0.842
12	5Q	1.232	1.0795
13	5D	1.232	1.317
14	6D	0.9395	1.3165
15	6Q	0.7705	1.3165
16	7Q	0.611	1.3165
17	7D	0.4395	1.3165
18	8D	0.1185	1.323
19	8Q	0.1205	1.149
20	V _{CC}	0.1205	0.929

CONNECT CHIP BACK TO V_{CC} OR FLOAT

Logic Diagram

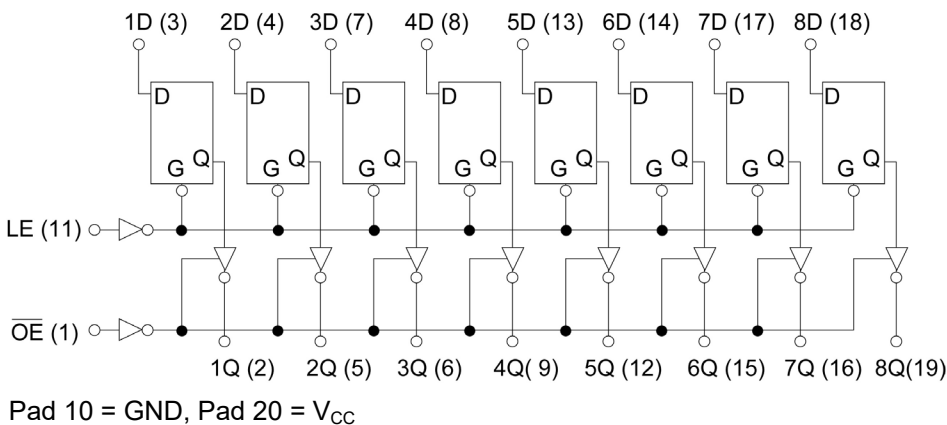

Truth Table

\overline{OE}	LE	D	Q
L	H	H	H
L	H	L	L
L	L	X	No Change
H	X	X	Z

H = High level (steady state)
L = Low level (steady state)
Z = High Impedance
X = Don't care





High Speed CMOS TTL Input – 74HCT373

Rev 1.0

07/02/19

Absolute Maximum Ratings¹

PARAMETER	SYMBOL	VALUE	UNIT
DC Supply Voltage (Referenced to GND)	V_{CC}	-0.5 to +7.0	V
DC Input Voltage (Referenced to GND)	V_{IN}	-0.5 to $V_{CC} + 0.5$	V
DC Output Voltage (Referenced to GND)	V_{OUT}	-0.5 to $V_{CC} + 0.5$	V
DC Input Current, per pad	I_{IN}	± 20	mA
DC Output Current, per pad	I_{OUT}	± 35	mA
DC Supply Current, V_{CC} or GND	I_{CC}	± 75	mA
Power Dissipation in Still Air ²	P_D	750	mW
Storage Temperature Range	T_{STG}	-65 to 150	°C

1. Operation above the absolute maximum rating may cause device failure. Operation at the absolute maximum ratings, for extended periods, may reduce device reliability. 2. Measured in plastic DIP package, results in die form are dependent on die attach and assembly method.

Recommended Operating Conditions³ (Voltages referenced to GND)

PARAMETER	SYMBOL	MIN	MAX	UNITS
Supply Voltage	V_{CC}	4.5	5.5	V
DC Input or Output Voltage	V_{IN}, V_{OUT}	0	V_{CC}	V
Operating Temperature Range	T_J	-40	+85	°C
Input Rise or Fall Times	t_r, t_f	-	500	ns

3. This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V_{IN} and V_{OUT} should be constrained to the range $GND \leq (V_{IN} \text{ or } V_{OUT}) \leq V_{CC}$. Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

DC Electrical Characteristics (Voltages Referenced to GND)

PARAMETER	SYMBOL	V_{CC}	CONDITIONS	LIMITS			UNITS
				25°C	85°C	FULL RANGE ⁴	
Minimum High-Level Input Voltage	V_{IH}	4.5V	$V_{OUT} = 0.1V \text{ or } V_{CC} - 0.1V$ $ I_{OUT} \leq 20\mu A$	2.0	2.0	2.0	V
		5.5V		2.0	2.0	2.0	
Maximum Low-Level Input Voltage	V_{IL}	4.5V	$V_{OUT} = 0.1V \text{ or } V_{CC} - 0.1V$ $ I_{OUT} \leq 20\mu A$	0.8	0.8	0.8	V
		5.5V		0.8	0.8	0.8	
Minimum High-Level Output Voltage	V_{OH}	4.5V	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $ I_{OUT} \leq 20\mu A$	4.4	4.4	4.4	V
		5.5V		5.4	5.4	5.4	
		4.5V	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $ I_{OUT} \leq 6.0mA$	3.98	3.84	3.84	
Maximum Low-Level Output Voltage	V_{OL}	4.5V	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $ I_{OUT} \leq 20\mu A$	0.1	0.1	0.1	V
		5.5V		0.1	0.1	0.1	
		4.5V	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $ I_{OUT} \leq 6.0mA$	0.26	0.33	0.33	





High Speed CMOS TTL Input – 74HCT373

Rev 1.0
07/02/19

DC Electrical Characteristics Continued (Voltages Referenced to GND)

PARAMETER	SYMBOL	V _{CC}	CONDITIONS	LIMITS			UNITS
				25°C	85°C	FULL RANGE ⁴	
Maximum Input Leakage Current	I _{IN}	5.5V	V _{IN} = V _{CC} or GND	±0.1	±1.0	±1.0	µA
Maximum 3-State Leakage Current	I _{OZ}	5.5V	High Z Output, V _{IN} = V _{IL} or V _{IH} , V _{OUT} = V _{CC} or GND	±0.5	±5	±5	µA
Maximum Quiescent Supply Leakage Current ⁵	I _{CC}	5.5V	V _{IN} = V _{CC} or GND I _{OUT} ≤ 0µA	4	40	40	µA
Additional Quiescent Supply Current ⁵	ΔI _{CC}	5.5V	V _{IN} = 2.4V, Any One Input. V _{IN} = V _{CC} or GND, Other Inputs I _{OUT} = 0µA	≥ -55°C	25°C to 85°C		mA
				2.9	2.4		

4. -40°C ≤ T_J ≤ +85°C 5. Total Supply Current = I_{CC} + ΣΔI_{CC}.

AC Electrical Characteristics⁶

PARAMETER	SYMBOL	V _{CC}	CONDITIONS	LIMITS			UNITS
				25°C	85°C	FULL RANGE ⁴	
Maximum Propagation Delay, D to Q (Figure 1,5)	t _{PLH} , t _{PHL}	5V ±10%	C _L = 50pF, Input t _r = t _f = 6ns	28	35	35	ns
Maximum Propagation Delay, LE to Q (Figure 2,5)	t _{PLH} , t _{PHL}	5V ±10%	C _L = 50pF, Input t _r = t _f = 6ns	32	40	40	ns
Maximum Propagation Delay, OE to Q (Figure 3,6)	t _{PLZ} , t _{PHZ}	5V ±10%	C _L = 50pF, Input t _r = t _f = 6ns	30	38	38	ns
Maximum Propagation Delay, OE to Q (Figure 3,6)	t _{PZL} , t _{PZH}	5V ±10%	C _L = 50pF, Input t _r = t _f = 6ns	35	44	44	ns
Maximum Output Transition Time, Any Output (Figure 1,5)	t _{TLH} , t _{THL}	5V ±10%	C _L = 50pF, Input t _r = t _f = 6ns	12	15	15	pF

6. Not production tested in die form, characterized by chip design and tested in package.





High Speed CMOS TTL Input – 74HCT373

Rev 1.0
07/02/19

AC Electrical Characteristics continued⁶

PARAMETER	SYMBOL	V _{CC}	CONDITIONS	LIMITS			UNITS
				25°C	85°C	FULL RANGE ⁴	
Maximum Input Capacitance	C _{IN}	5V ±10%	C _L = 50pF, Input t _r = t _f = 6ns	10	10	10	pF
Maximum 3-State Output Capacitance	C _{OUT}	5V ±10%	C _L = 50pF, Input t _r = t _f = 6ns	15	15	15	pF
Power Dissipation Capacitance per Latch ⁷	C _{PD}	-	T _J = 25°C, V _{CC} = 5.0V	TYPICAL			pF
				65			

6. Not production tested in die form, characterized by chip design and tested in package.

7. Used to determine the no-load dynamic power consumption: $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$.

Timing Requirements⁶

PARAMETER	SYMBOL	V _{CC}	CONDITIONS	LIMITS			UNITS
				25°C	85°C	FULL RANGE ⁴	
Minimum Setup Time, D to LE (Figure 4)	t _{SU}	5V ±10%	Input t _r = t _f = 6ns	10	13	13	ns
Minimum Hold Time, LE to D (Figure 4)	t _H	5V ±10%	Input t _r = t _f = 6ns	10	13	13	ns
Minimum Pulse Width, LE (Figure 4)	t _W	5V ±10%	Input t _r = t _f = 6ns	12	15	15	ns
Maximum Input Rise & Fall Times (Figure 4)	t _r , t _f	5V ±10%	Input t _r = t _f = 6ns	500	500	500	ns





High Speed CMOS TTL Input – 74HCT373

Rev 1.0
07/02/19

Switching Waveforms

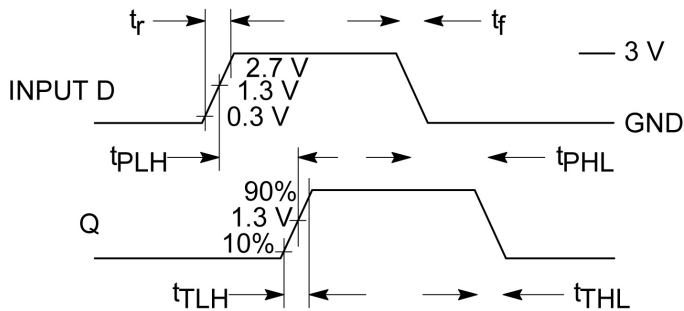


Figure 1 – Propagation Delay & Output Transition Time

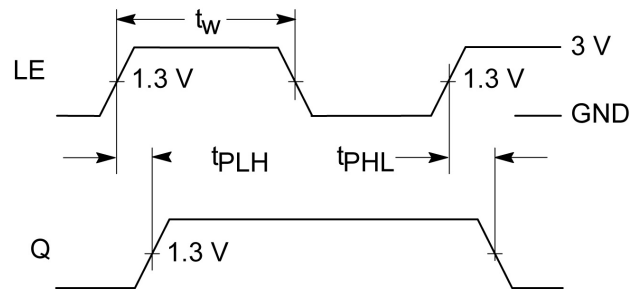


Figure 2 – Propagation Delay – Latch Enable to Q

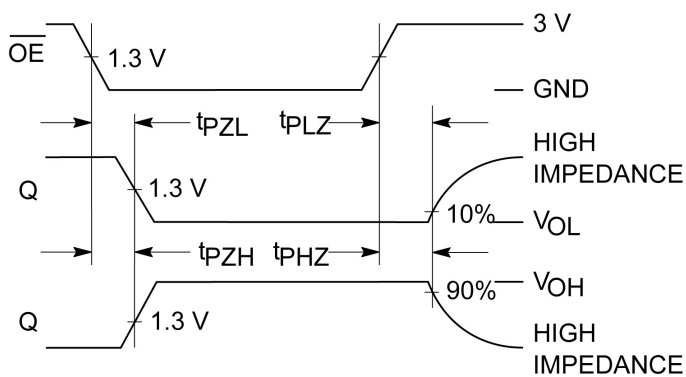


Figure 3 – Propagation Delay - Output Enable to Q


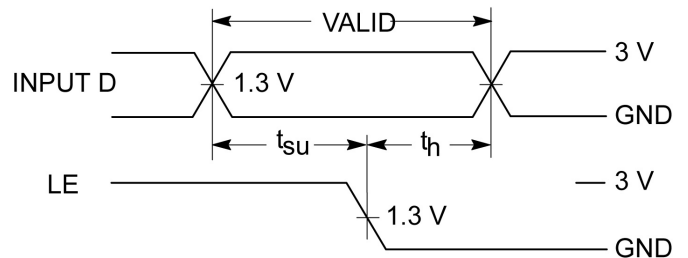


Figure 4 – Timing Requirements






Test Circuits

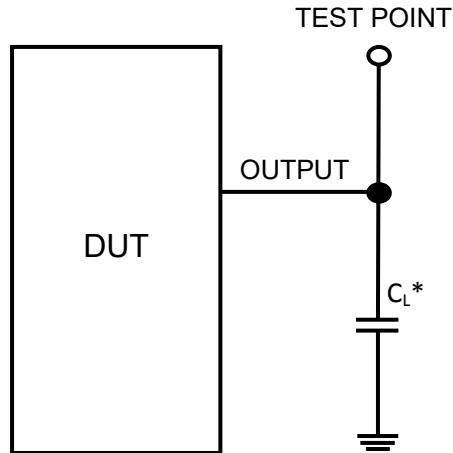

* Includes all probe and jig capacitance

Figure 5

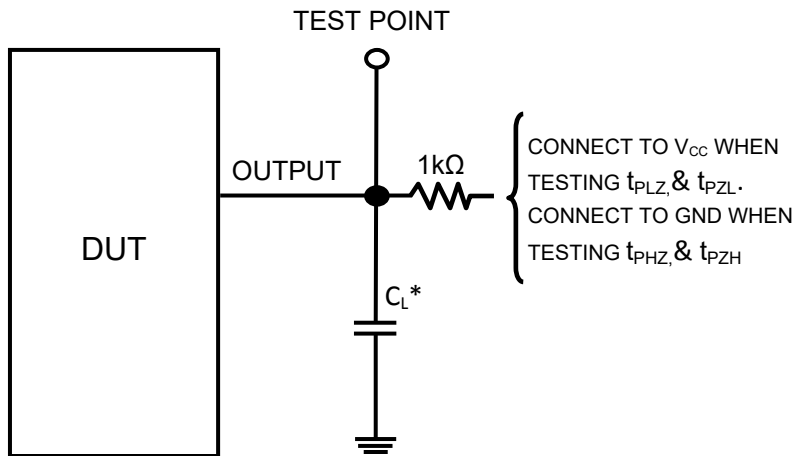

* Includes all probe and jig capacitance

Figure 6

DISCLAIMER: The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Silicon Supplies Ltd hereby disclaims any and all warranties and liabilities of any kind.

LIFE SUPPORT POLICY: Silicon Supplies Ltd components may be used in life support devices or systems only with the express written approval of Silicon Supplies Ltd, if a failure of such components can reasonably be expected to cause the failure of that life support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

