



75V 0.3A Fast Switching Diode - BAW62



Rev 1.1
24/10/24

Small-Signal high speed switching diode in bare die form

Features:

- Fast Switching Speed
- High conductance
- General purpose switching applications
- High reliability tested grades.

Die Dimensions in μm (mils)

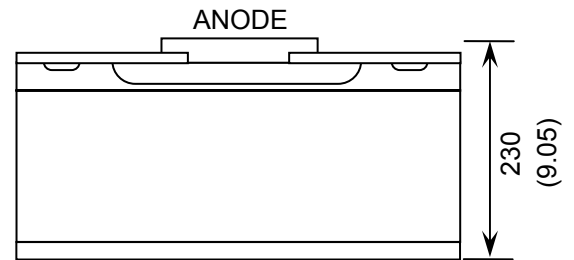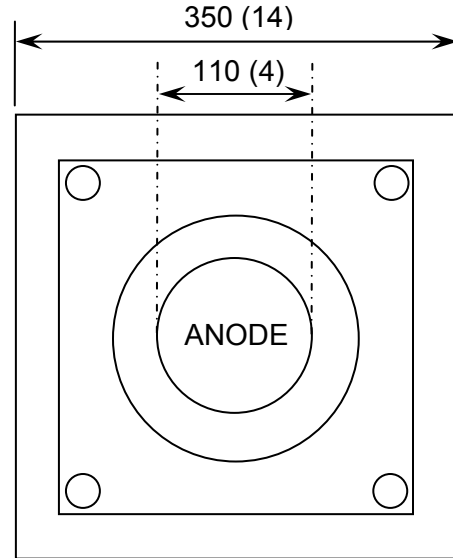

CHIP BACKSIDE IS CATHODE

Ordering Information

The following part suffixes apply:

- No suffix - MIL-STD-750 /2073 Visual Inspection
- "H" - MIL-STD-750 /2073 Visual Inspection
+ MIL-PRF-38534 Class H LAT
- "K" - MIL-STD-750 /2073 Visual Inspection
+ MIL-PRF-38534 Class K LAT

LAT = Lot Acceptance Test.

For further information on LAT process flows see below.

www.siliconsupplies.com/quality/bare-die-lot-qualification

Supply Formats:

- Default – Die in Waffle Pack (400 per tray capacity)
- Sawn Wafer on Tape – By specific request
- Unsawn Wafer – By specific request
- Die Thickness \leftrightarrow 230 μm (9 Mils) – On request
- With additional electrical selection – On request

Mechanical Specification

Die Size (Unsawn)	350 x 350 13.78 x 13.78	μm mils
Anode Pad Size	110 \varnothing 4.33 \varnothing	μm mils
Die Thickness	230 (± 15) 9.05 (± 0.59)	μm mils
Top Metal Composition	Al	
Back Metal Composition	AuAs	





75V 0.3A Fast Switching Diode - BAW62

Rev 1.1
24/10/24

Absolute Maximum Ratings¹ $T_J = 25^\circ\text{C}$ unless otherwise stated

PARAMETER	SYMBOL	VALUE	UNIT	
Non-repetitive Peak Reverse Voltage	V_{RSM}	105	V	
Repetitive Peak Reverse Voltage	V_{RRM}	75	V	
Average Rectified Forward Current	I_O	300	mA	
Recurrent Peak Forward Current	I_f	450	mA	
Non-repetitive Peak forward surge current	I_{FSM}	Pulse width 1s	1	A
		Pulse width 1 μ s	4	
Power Dissipation	P_D	500	mW	
Operating Junction temperature	T_J	-55 to 175	$^\circ\text{C}$	
Storage Temperature Range	T_{STG}	-65 to 200	$^\circ\text{C}$	

1. Operation above the absolute maximum rating may cause device failure. Operation at the absolute maximum ratings, for extended periods, may reduce device reliability.

Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise stated

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Breakdown Voltage	V_R	$I_R = 5\mu\text{A}$	75	-	-	V
Forward Voltage ²	V_F	$I_F = 5\text{mA}$	0.62	-	0.75	V
		$I_F = 100\text{mA}$	-	-	1	
		$I_F = 100\text{mA}, T_J = 150^\circ\text{C}$	-	-	0.93	
Reverse Leakage	I_R	$V_R = 20\text{V}$	-	-	25	nA
		$V_R = 20\text{V}, T_J = 150^\circ\text{C}$	-	-	50	
		$V_R = 50\text{V}$	-	-	200	
		$V_R = 75\text{V}$	-	-	5	μA
		$V_R = 75\text{V}, T_J = 150^\circ\text{C}$	-	-	100	
Total Capacitance	C_T	$V_R = 0\text{V}, f = 1\text{MHz}$	-	-	2	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10\text{mA}, I_{rr} = 10\text{mA}, R_L = 100\Omega$	-	-	4	ns

2. Pulse Width = 8.3ms, Non-recurrent square wave

DISCLAIMER: The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Silicon Supplies Ltd hereby disclaims any and all warranties and liabilities of any kind.

LIFE SUPPORT POLICY: Silicon Supplies Ltd components may be used in life support devices or systems only with the express written approval of Silicon Supplies Ltd, if a failure of such components can reasonably be expected to cause the failure of that life support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

